



**Multimedia Products**


1818 NE 140<sup>th</sup>  
 Portland, OR 97230  
 503-255-1451  
 503-251-0586 fax  
 support@inday.com  
 www.inday.com

# DUAL Toslink Distribution Amplifier


Model: TLDA-22

- Two Independent 1-In to 2-Out Toslink Splitters
- Not a passive splitter. Will not degrade the source signal
- Optically isolated inputs and outputs.
- Shutters on inputs and outputs. No Toslink Plugs
- Each output has its own Fiber Optic Transmitter

The TLDA-22 is a fully active device. The Inputs are converted from optical to electrical and sent to 2 independent Toslink Transmitters. This ensures that ONE bad fiber cable will not destroy your signal.

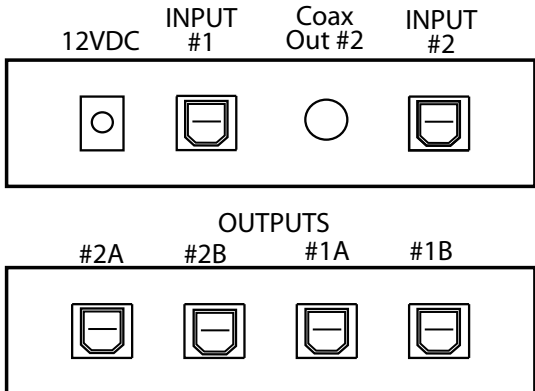

**Typical Application**

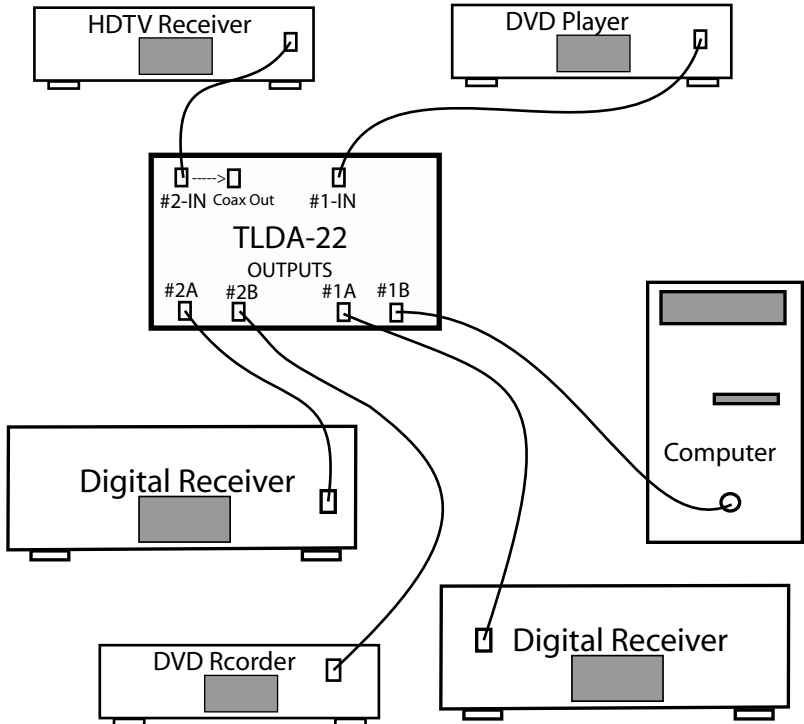

**Specifications:**

- INPUT:**  
 2 Toslink w/Shutter  
 Accepts any standard SPDIF format
- ALL OUTPUTS:**  
 4 Toslink w/Shutters
- POWER:**  
 12VDC-Unregulated Nominal  
 @ 60ma Max.  
 Wall Transformer supplied
- DIMENSION:**  
 4"W x 2.5"L x 1"H
- TEMPERATURE**  
 0 TO 50 DEGREES C
- HUMIDITY**  
 0 TO 90% (non-condensing)